



10300/1/1

24 Vdc to 5 Vdc/12 A converter

Description

The supply voltage of the FSC system is 24 Vdc, which can be powered from the plant's 24 Vdc supply system with battery back-up. The FSC system uses an internal 5 Vdc to power the FSC modules. The 10300/1/1 DC/DC converter provides the internal 5 Vdc with galvanic isolation between the two supply voltages.

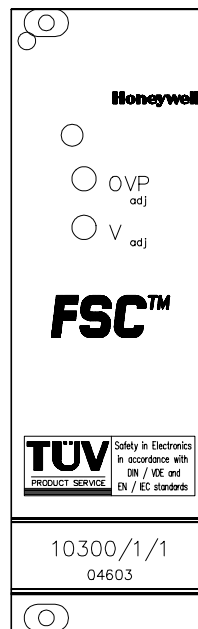


Figure 1 Front view

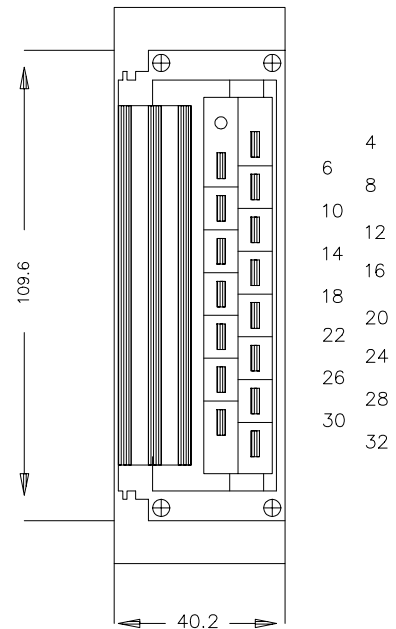



Figure 2 Back view

Note:

Keep 10300/1/1 modules off-line for at least 30 seconds after being on-line. 10300/1/1 modules have an NTC resistor as an inrush current limiter. Replacing (or repowering) the module within 30 seconds after removal (or power-off) may cause a supply voltage dip which may trip the system (because the NTC resistor did not yet cool down sufficiently).

Pin allocation

The back view and pin allocation of the 10300/1/1 power connector are as follows:

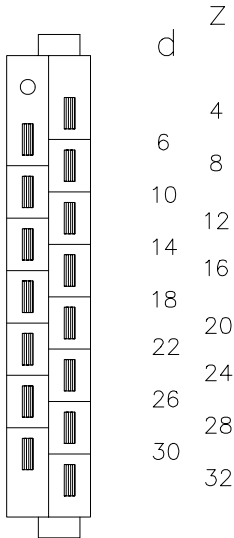

		z4	Supply 5 Vdc
d6	+ sense	z8	Supply 5 Vdc
d10	- sense	z12	GND 5 Vdc
d14	(see note below)	z16	GND 5 Vdc
d18		z20	
d22		z24	Supply 0 Vdc
d26	Supply 0 Vdc	z28	Supply 24 Vdc
d30	Supply 24 Vdc	z32	Earth

Notes:

1. 10300/1/1 modules without a suffix code and with suffix code 04601 have an ON/OFF input on pin d14. This pin should not be connected.
2. The 10300/1/1 module is a pin-compatible upgraded version of the GK60 module.

Derating curve

The derating curve of the 10300/1/1 module is as follows:

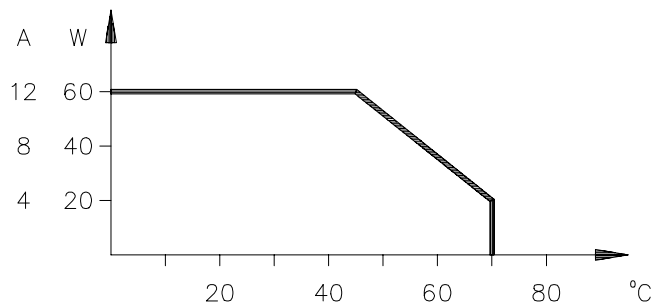


Figure 3 Derating curve (current and power vs. ambient temperature)



Wiring diagram

The 10300/1/1 module is wired in accordance with the wiring diagram below:

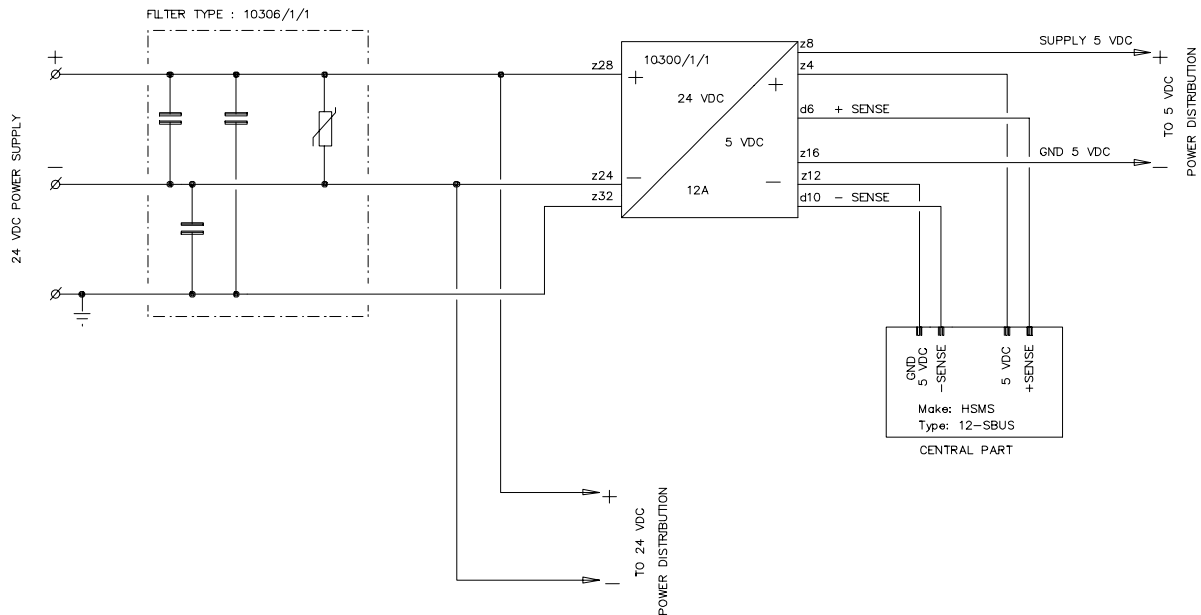


Figure 4 Wiring diagram

Note:

If the 24 Vdc is supplied from an M24-20HE or M24-12HE power supply that is located in the same cabinet as the FSC system, the input filter is not mandatory.

As the limits on the 5 Vdc power supply are very tight ($\pm 5\%$), this module must be placed closely to the system bus (e.g. 12-SBUS). Use the sense wires correctly and use short wires of proper wire diameter to minimize voltage drop over the wiring.

The minimum wire diameters for 'SUPPLY 5 VDC' and 'GND 5 VDC' to the system bus of the Central Part are as follows:

- up to 8 A: 2.5 mm² (AWG 14)
 - up to 12 A: 6 mm² (AWG 10)
-



Technical data

The 10300/1/1 module has the following specifications:

General	Type number:	10300/1/1 04603*
	Approvals:	CE, TÜV, UL**
	Software versions:	all
	Space requirements:	8 TE, 3 HE (= 8 HP, 3U)
Power	Power requirements:	current < 3.9 A at 24 Vdc voltage 24 Vdc (-15%...+30%)
	Inrush current:	< 18 A
Environment	Ambient temperature:	0°C to 60°C (32°F to 140°F) (see derating curve, Figure 3)
Output	Output voltage:	5 Vdc with overvoltage protection
	Ripple content:	< 40 mV p-p (at full load)
	Output current:	12 A at 0°C to 45°C (32°F to 113°F) 8 A at 0°C to 60°C (32°F to 140°F)
	Hold-up time:	≥ 0 ms
	Output voltage setting (V adj):	5.00 Vdc measured across system bus connections
	Overvoltage protection (OVP adj):	5.75 Vdc
	Efficiency:	≥ 70%

Notes:

- * For 10300/1/1 modules without a suffix code, the output LED may remain on in redundant configurations with single I/O, even if the 10300/1/1 is switched off (LED is energized by a redundant 10300/1/1 unit).
 - ** 10300/1/1 modules with suffix code 04602 or less are not CE-approved.
-

While this information is presented in good faith and believed to be accurate, Honeywell Safety Management Systems B.V. disclaims the implied warranties of merchantability and fitness for a particular purpose and makes no express warranties except as may be stated in its written agreement with and for its customer. In no event is Honeywell Safety Management Systems B.V. liable to anyone for any indirect, special or consequential damages. The information and specifications in this document are subject to change without notice.