


Specifications and Ordering Information

3500/33 16-Channel Relay Module



Description

The 16-Channel Relay Module is a full-height module that provides 16 relay outputs. Any number of 16-Channel Relay Modules can be placed in any of the slots to the right of the Rack Interface Module. Each output of the 16-Channel Relay Module can be independently programmed to perform needed voting logic.

Each relay utilized on the 16-Channel Relay Module includes "Alarm Drive Logic". The Alarm Drive Logic is programmed using AND and OR logic, and can utilize alarming inputs (alerts and dangers), Not-OK, or individual PPLs from any monitor channel or any combination of monitor channels in the rack. This Alarm Drive Logic is programmed using the 3500 Rack Configuration Software to meet the specific needs of the application.

Note: Triple Modular Redundant (TMR) applications require the use of the 3500/34 TMR Relay Module. Consult Bently Nevada Specification and Ordering Information part number 141534-01 for details.

Specifications

Inputs

Power Consumption: 5.8 Watts typical.

Outputs

OK LED: Illuminated when module is functioning properly.

TX/RX LED: Transmit and Receive. Flashes to indicate proper communications between this module and other modules within the rack.

CH ALARM LED: Illuminated to indicate that the Relay Channel is in an alarm state.

Relays

Type: Single-pole, double-throw (SPDT) relays.

Environmental Sealing Epoxy-sealed.

Arc Suppressor 250 Vrms, installed as standard.

Contact Life 100,000 cycles @ 5 A, 24 Vdc or 240 Vac.

Operation Four groups of four channels are switch selectable for Normally De-energized or Normally Energized.

Environmental Limits

Operating Temperature: -30°C to +65°C
(-22°F to +150°F).

Storage Temperature: -40°C to +85°C
(-40°F to +185°F).

Humidity: 95%, non-condensing.

CE Mark Directives

EMC Directives:

EN50081-2: Radiated Emissions
EN 55011, Class A

Conducted Emissions
EN 55011, Class A

EN50082-2: Electrostatic Discharge
EN 61000-4-2, Criteria B

Radiated Susceptibility
ENV 50140, Criteria A

Conducted Susceptibility
ENV 50141, Criteria A

Electrical Fast Transient
EN 61000-4-4, Criteria B

Surge Capability
EN 61000-4-5, Criteria B

Magnetic Field
EN 61000-4-8, Criteria A

Power Supply Dip
EN 61000-4-11, Criteria B

Radio Telephone
ENV 50204, Criteria B

Low Voltage Directives:

Safety Requirements
EN 61010-1

Hazardous Area Approvals

CSA/NRTL/C: Class I, Division 2, Groups A through D.

Contact Ratings

Resistive load:

Max switched power: dc: 160 W
ac: 1500 VA

Minimum switched current: 100mA @ 12 Vdc

Max switched current: 6 A

Max switched voltage: dc: 300 Vdc
ac: 400 Vac

Physical

Main Module:

Dimensions (Height x Width x Depth): 241 mm x 24.4 mm x 242 mm
(9.50 in x 0.96 in x 9.52 in).

Weight: 0.7 kg (1.6 lbs.).

I/O Module:

Dimensions (Height x Width x Depth): 241 mm x 24.4 mm x 99.1 mm
(9.50 in x 0.96 in x 3.90 in).

Weight: 0.4 kg (1.0 lbs.).

Rack Space Requirements

Main Module: 1 full-height front slot.

I/O Modules: 1 full-height rear slot.

Ordering Considerations

- The 3500/33 requires 3500 Rack Configuration software, version 3.3 or later
- The 3500/33 requires 3500 Data Acquisition software, version 2.40 or later
- The 3500/33 requires 3500 Data Display software, version 1.40 or later
- When used with a 3500/93 LCD Display module, the 3500/93 will require firmware revision P or later.
- When used with a 3500/94 VGA Display module, the 3500/94 will require firmware revision C or later.

Ordering Information

3500 16-Channel Relay Module

3500/33 -AXX-BXX


Option Descriptions

<i>A: Output Module</i>	0 1	16-Channel Relay Output Module
<i>B: Agency Approval Option</i>	0 0	None
	0 1	CSA/NRTL/C

Spares

149986-01	Spare 16-Channel Relay Control Module
149992-01	Spare 16-Channel Relay Output Module
04425545	Grounding Wrist Strap (single use)
162291-01	16-Channel Relay Module Manual
00580453	Connector Header, Internal Termination, 16-position, Green

Figures and Tables

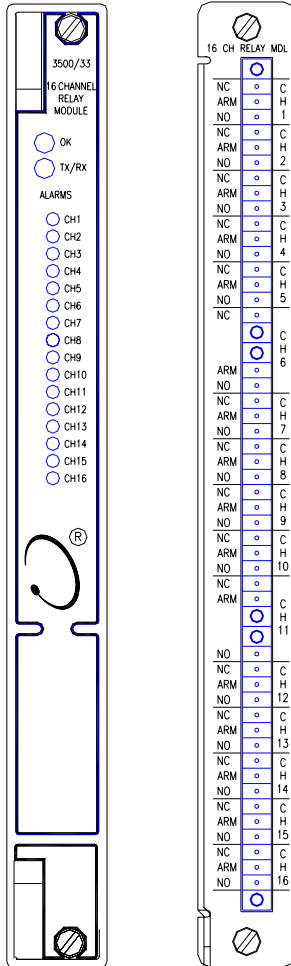

Front and rear view of the 16-Channel Relay Module

All data is subject to change without notice

© 2004 Bently Nevada L.L.C.

® used in this document are registered marks of Bently Nevada

FOR REFERENCE ONLY